


4

3


2

1

REVISIONS		
REV.	DESCRIPTION	DATE
1	INITIAL RELEASE	7/18/2020

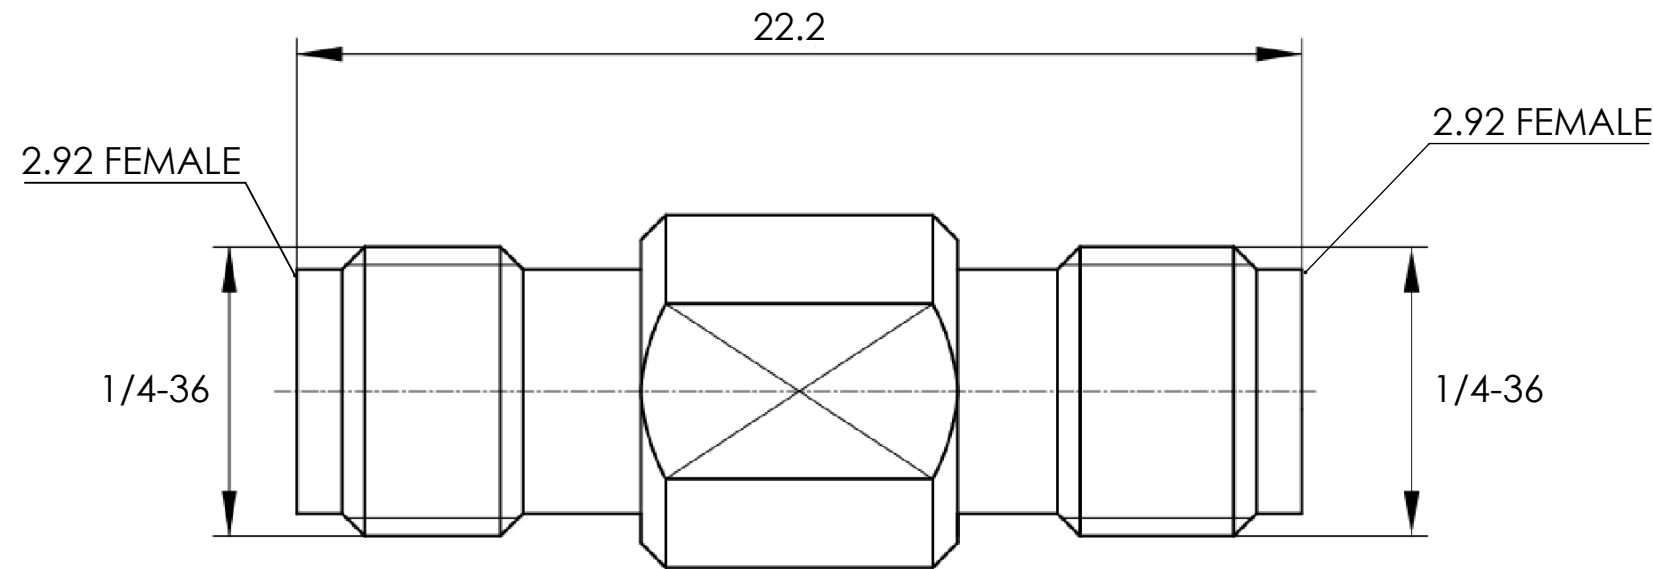

- ELECTRICAL:
 - IMPEDENCE 50Ω
 - FREQUENCY DC - 40GHz
 - VSWR 1.20 : 1 MAX
 - INSERTION LOSS 0.3dB MAX
- MATERIAL:
 - PIN: BERYLLIUM COPPER, GOLD PLATED
 - BODY: SUS 303, PASSIVATED
 - INSULATOR: PEI
- ENVIRONMENTAL:
 - TEMPERATURE RANGE: -45°C~+125°C
 - MATING CYCLES: >500
 - RoHS COMPLIANT
- INTERFACE STANDARD:
 - MIL-STD-348A

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 COAX WIZARD coaxwizard.com
DIMENSIONS ARE IN MM		DRAWN	JX	
TOLERANCES:		CHECKED	TC	07/18/20
ANGULAR: MACH ± 1°		ENG APPR.	QW	07/18/20
BEND ± 1°		MFG APPR.		
INTEGER ± 3		Q.A.		
ONE PLACE DECIMAL ± 1.0		COMMENTS:		
TWO PLACE DECIMAL ± 0.50		CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY		
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5				
MATERIAL	NA			
FINISH	NA			
TITLE:		SIZE	PN. NO.	REV
ADAPTER, 2.92MM FEMALE, 2.92MM FEMALE, STRAIGHT		B	ADP-2.92F-2.92F-S	1
SCALE: 1:2		WEIGHT:	SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Coax Wizard. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Coax Wizard IS PROHIBITED.

4

3

2

1

B

B

A

A