


4

3

2

1

REVISIONS		
REV.	DESCRIPTION	DATE
1	INITIAL RELEASE	7/18/2020

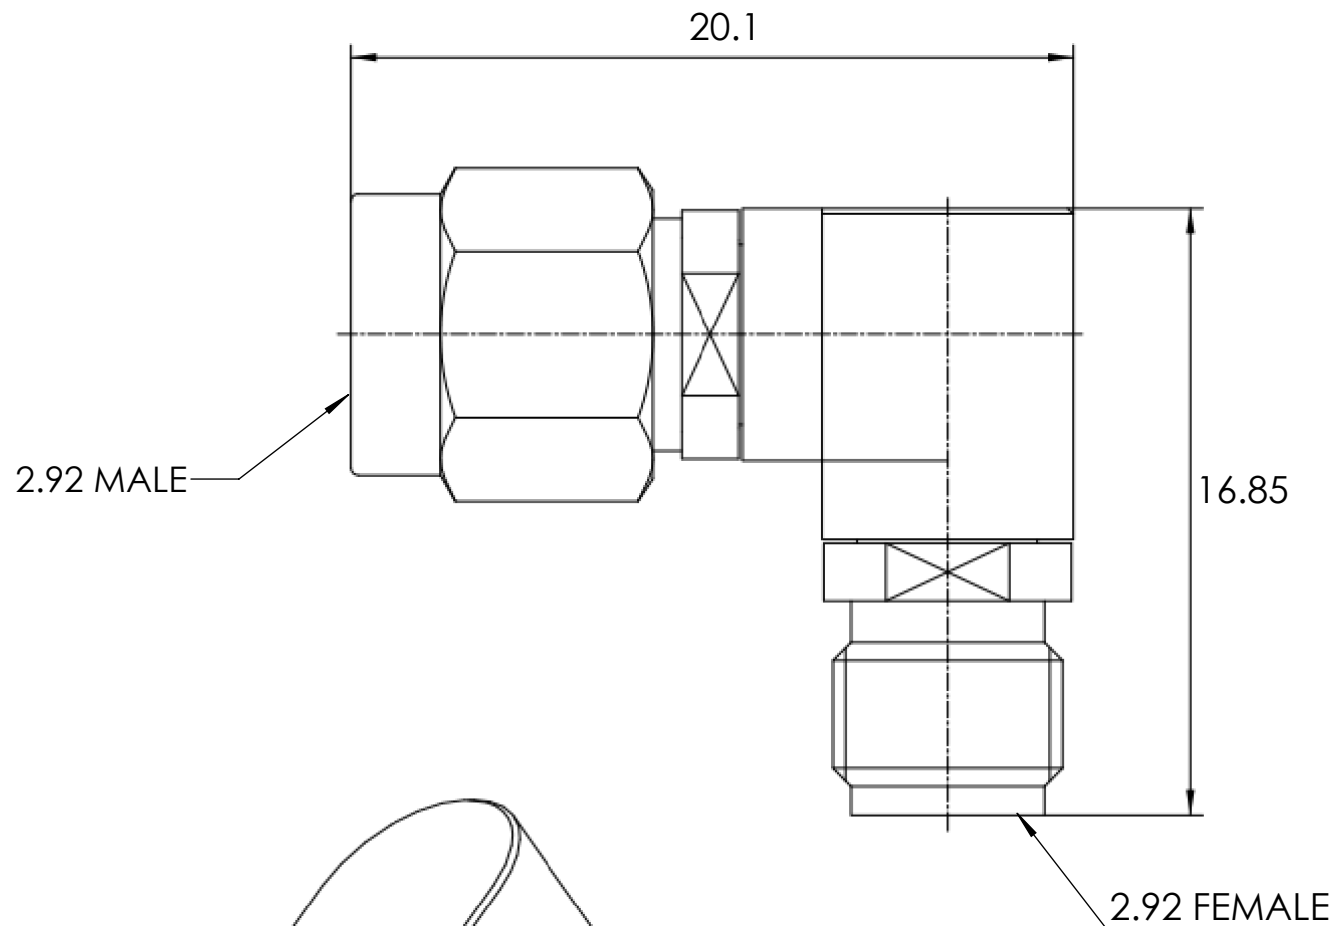

1. ELECTRICAL:
- IMPEDENCE

50Ω
- FREQUENCY

DC - 40GHz
- VSWR

1.25 : 1 MAX
2. MATERIAL:
- PIN: BERYLLIUM COPPER, GOLD PLATED
- BODY: STAINLESS STEEL, PASSIVATED
- INSULATOR: PEI
3. ENVIRONMENTAL:
- TEMPERATURE RANGE: -55°C~+165°C
- MATING CYCLES: >500
- RoHS COMPLIANT
4. INTERFACE STANDARD:
- MIL-STD-348A

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Coax Wizard. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Coax Wizard IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		COAX WIZARD coaxwizard.com	
DIMENSIONS ARE IN MM TOLERANCES: ANGULAR: MACH ± 1° BEND ± 1° INTEGER ± 3 ONE PLACE DECIMAL ± 1.0 TWO PLACE DECIMAL ± 0.50 INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5		DRAWN	JX	07/18/20		TITLE: ADAPTER, 2.92MM MALE, 2.92MM FEMALE, RIGHT ANGLE	
		CHECKED	TC	07/18/20			
		ENG APPR.	QW	07/18/20			
		MFG APPR.					
		Q.A.					
MATERIAL		COMMENTS:				SIZE PN. NO. REV	
NA		CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY				B ADP-2.92M-2.92F-R 1	
FINISH						SCALE: 1:2 WEIGHT: SHEET 1 OF 1	
NA							