


4

3

2

1

REVISIONS		
REV.	DESCRIPTION	DATE
1	INITIAL RELEASE	7/18/2020

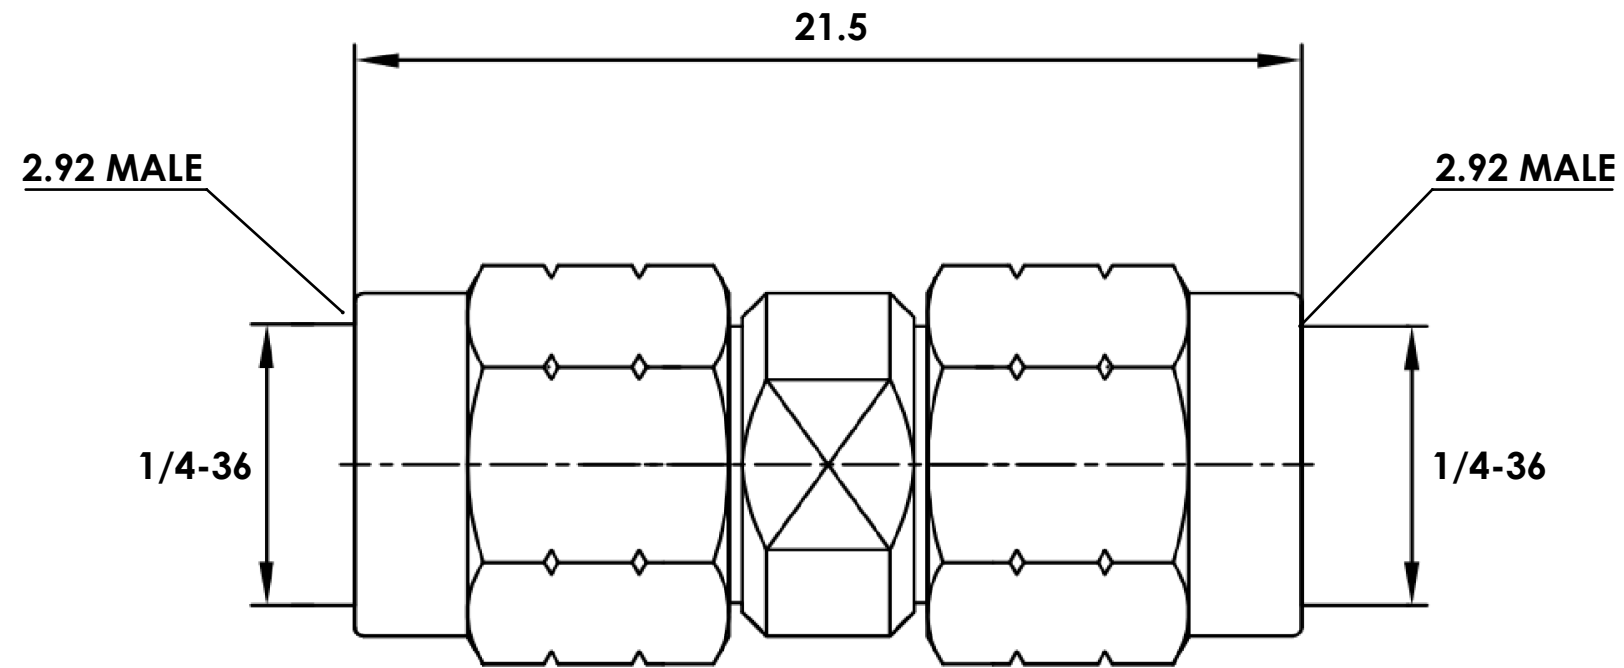

- ELECTRICAL:
 - IMPEDENCE 50Ω
 - FREQUENCY DC - 40GHz
 - VSWR 1.25 : 1 MAX
- MATERIAL:
 - PIN: BERYLLIUM COPPER, GOLD PLATED
 - BODY: SUS 303, PASSIVATED
 - INSULATOR: PEI
- ENVIRONMENTAL:
 - TEMPERATURE RANGE: -55°C~+125°C
 - MATING CYCLES: >500
 - RoHS COMPLIANT
- INTERFACE STANDARD:
 - MIL-STD-348A

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN MM		DRAWN	JX 07/18/20
TOLERANCES:		CHECKED	TC 07/18/20
ANGULAR: MACH ± 1°		ENG APPR.	QW 07/18/20
BEND ± 1°		MFG APPR.	
INTEGER ± 3		Q.A.	
ONE PLACE DECIMAL ± 1.0		COMMENTS:	
TWO PLACE DECIMAL ± 0.50		CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY	
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5			
MATERIAL	NA		
FINISH	NA		



coaxwizard.com

TITLE:
ADAPTER, 2.92MM MALE,
2.92MM MALE, STRAIGHT

SIZE	PN. NO.	REV
B	ADP-2.92M-2.92M-S	1

SCALE: 1:2	WEIGHT:	SHEET 1 OF 1
------------	---------	--------------

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Coax Wizard. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Coax Wizard IS PROHIBITED.

4

3

2

1

B

A

B

A