



REVISIONS		
REV.	DESCRIPTION	DATE
1	INITIAL RELEASE	7/18/2020

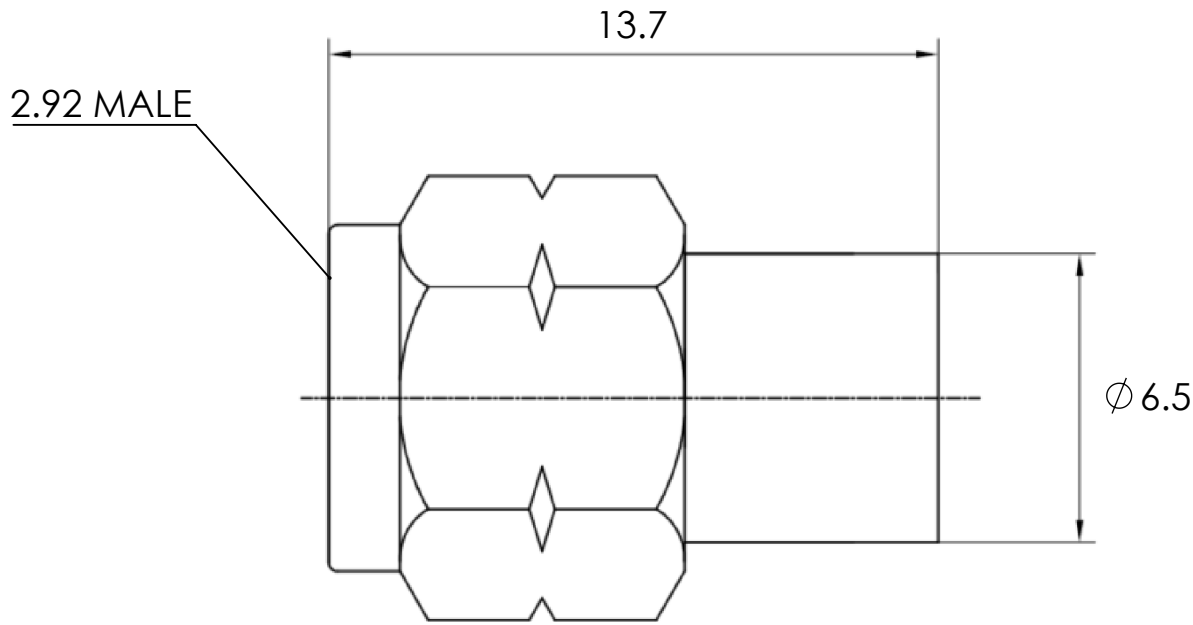

1. ELECTRICAL:
  - IMPEDENCE 50Ω
  - FREQUENCY DC - 40GHz
  - VSWR 1.30 : 1 MAX
  - POWER 0.5W MAX
2. MATERIAL:
  - PIN: BERYLLIUM COPPER, GOLD PLATED
  - BODY: SUS 303, PASSIVATED
  - INSULATOR: PEI

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Coax Wizard. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Coax Wizard IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div> COAX WIZARD</div> <div>coaxwizard.com</div>			
DIMENSIONS ARE IN MM		DRAWN	JX	07/18/20	TITLE:  TERMINATION, 2.92MM MALE, 0.5 WATTS		
TOLERANCES:		CHECKED	TC	07/18/20			
ANGULAR: MACH ± 1°		ENG APPR.	QW	07/18/20			
BEND ± 1°		MFG APPR.					
INTEGER ± 3		Q.A.					
ONE PLACE DECIMAL ± 1.0		COMMENTS:			SIZE PN. NO. REV <b>B</b> TRM-2.92M-0.5W <b>1</b>		
TWO PLACE DECIMAL ± 0.50							
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5		CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY			SCALE: 1:2 WEIGHT: SHEET 1 OF 1		
MATERIAL							
NA							
FINISH							
NA							